




Direct Service Done Right



07 7200
Rooftop Products
Catalog

**DIV
5**

**STAIR TREADS
+ NOSINGS**
05 5000



FALL PROTECTION
05 5213 / 07 7200



For over 70 years Nystrom has been the go to manufacturer for specialty building products.

Today we provide a wide range of floor, roof and safety related access products that help create safer, more accessible buildings.

**DIV
7**


ROOF HATCHES
07 7200



SMOKE VENTS
07 7200



**PREFORMED JOINT SEALS +
EXPANSION JOINT SYSTEMS**
07 9100 + 07 9513



**DIV
8**

**ACCESS DOORS
+ PANELS**
08 3100



**FLOOR DOORS
+ HATCHES**
08 3483



**LUMINOUS EGRESS
PRODUCTS**
10 1443



**DIV
10**

**DIV
10**

**WALL + DOOR
PROTECTION**
10 2600



**FIRE PROTECTION CABINET
+ FIRE EXTINGUISHERS**
10 4413 + 10 4416



**ENTRANCE MATS + FRAMES
ENTRANCE FLOOR GRILLES**
12 4813 + 12 4816



**DIV
12**



Rooftop Products

ROOF HATCHES 5-11

Personnel II™	5
Personnel™	6
ThermalMAX™	7
SunLit™	8
Security	9
Hurricane Hatch	10
Equipment Hatch	11

ROOF HATCH FALL PROTECTION 12-13

Safety Railing	12
Ladder Safety Post	12
Grab Bar	12

SMOKE VENTS 14-19

SmokEscape™	14-15
SunLit eco™	16
SunLit™	17-18
AcousticMAX™	19

SMOKE VENT FALL PROTECTION 20-21

Safety Railing	20
Burglar Bars	21
Screen	21

FALL PROTECTION 22-23

Weighted Base Guardrail	22
Permanent Guardrail	23


Options

Access Type	24
Lock	24
Operation	24
Curb	25
Dome	25
Multi-Wall	25
Powder Coat	26
Anodize	27
Kynar	27

Direct Service Done Right

Nystrom offers a broad line of specialty building products to better serve construction professionals and architects.

We have customer focused professionals and hassle-free processes that directly serve and simplify the building process.

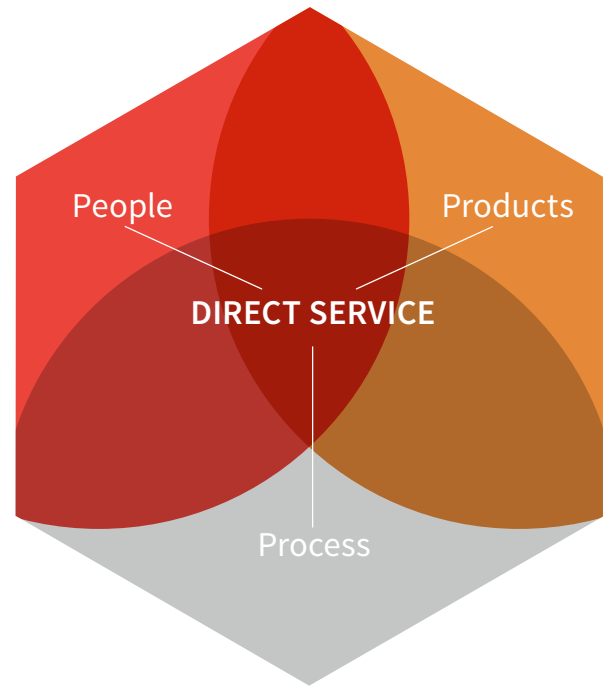

PEOPLE

architects, engineers, designers, estimators, construction professionals, and service specialists

PROCESS

estimating & bid design support, tech support, logistics support, installation support, cad, revit/bim

PRODUCTS

standard & custom designs, warehousing, quality assurance, exceptional warranties, leed certification, labeling & tagging

TIME

EFFICIENCY

SERVICE



SPECIFICATION SUPPORT

By giving architects, designers and contractors open access to our expert team, we simplify the process of specifying and procuring access products from design through delivery and installation.

Personnel™ II

ROOF HATCH

The Personnel II Roof Hatch is designed with OSHA life safety in mind and provides easy access to roof areas. Simple to install and operate, this roof hatch is OSHA Compliant, stays cooler and conserves energy.

FEATURES

GAS SPRING OPERATION Designed for smooth one-handed operation that complies with OSHA safety standards, this roof hatch is easy to open and close.

CLEAR LABELING Color coordinated labels clearly identify safety yellow pull down handle and red hold open arm release.

RAILING-READY Safety railings install quick and easy with predrilled counterflash, designed to meet the 42" height requirement per OSHA and IBC.



DETAILS

MATERIAL

- Aluminum: 11 gauge, mill
- Steel: Galvanneal 14 gauge, ANSI 70 Gray powder coat
- Stainless Steel: Type 304, 14 gauge, 2B matte finish

COVER Formed metal cover with liner, stiffened to withstand a live load of 40psf with a max deflection of 1/150 of the span

CURB Single wall curb with EZ tab counterflash and mounting flange

INSULATION 1 inch polystyrene in cover, 1 inch polyiso around curb or optional 2 inch polyiso in cover and curb; R-12, specify -IRR

GASKET Extruded EPDM adhesive backed gasket seal, continuous around cover

SPRING Gas spring with integrated damper for smooth, controlled lift assistance

HINGE Heavy-duty pintle hinge with stainless steel hinge pin

HOLD OPEN ARM Zinc plated steel automatic hold open arm with red vinyl grip handle locks cover in open position

LATCH Zinc plated steel slam latch with exterior and interior turn handle and padlock hasps; 20psf wind uplift for lengths ≤ 60 inches.

PULL HANDLE Interior safety pull down handle, yellow powder coat

STANDARD MODELS

GRAY	WHITE	ALUMINUM	SIZE (IN.)	ACCESS
G3630	W3630	A3630	36 x 30	Ladder
G3636	W3636	A3636	36 x 36	Ladder
G4848	W4848	A4848	48 x 48	Ladder
G3054	W3054	A3054	30 x 54	Ship Stair

Additional sizes and options available, call for more information.

FINISHES



Mill
Aluminum




ANSI 70 Gray
Powder Coat



High
Reflectance
White Powder
Coat




2B Matte
Stainless Steel

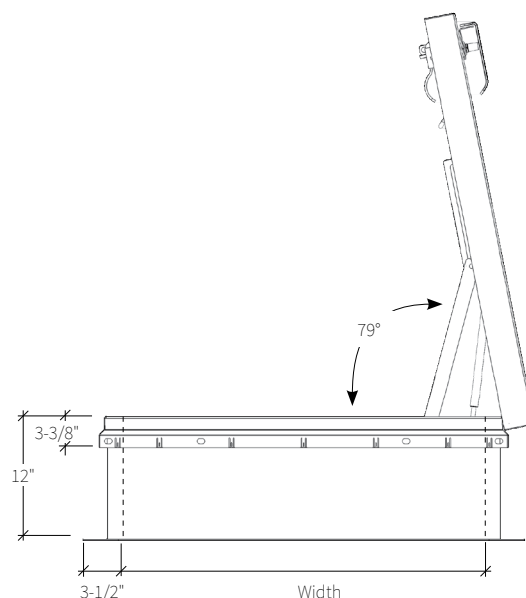

Personnel™

ROOF HATCH

Nystrom's Personnel Roof Hatch is easily customizable and provides safe access to roof areas on your building. Sized for ladder, ship stair, and service stair access with optional safety railings, grab bars and a variety of materials and finishes.

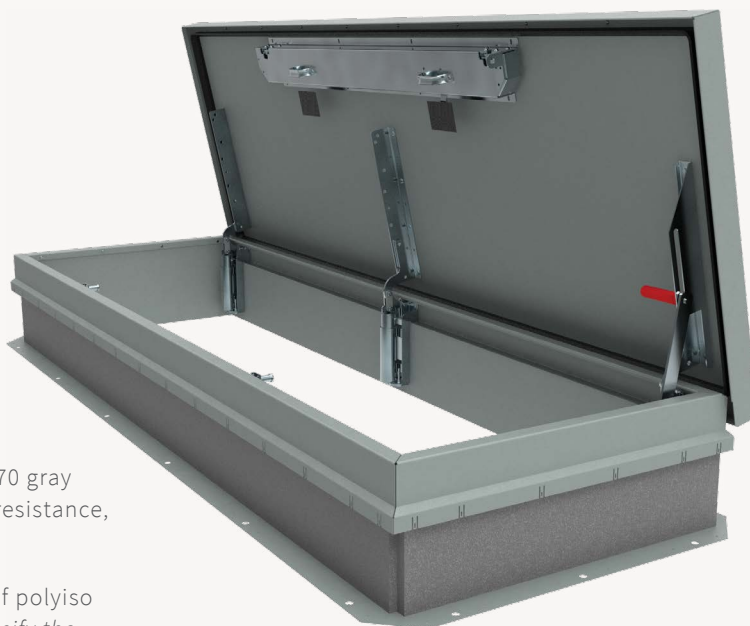

FEATURES

POWDER COAT FINISH The standard (RHPG) ANSI 70 gray powder coat finish provides outstanding corrosion resistance, superior gloss and color retention.

INSULATION OPTIONS Available with two inches of polyiso insulation for a thermally efficient design; R-12. *Specify the Energy Efficient Roof Hatch with a -IRR.*

DETAILS

MATERIAL OPTIONS

- Aluminum: 11 gauge, mill finish
- Galvanneal Steel: 14 gauge, ANSI 70 Gray
- Stainless Steel: Type 304, 14 gauge, 2B matte finish

COVER Formed metal cover with liner, stiffened to withstand a live load of 40psf with a max deflection of 1/150 the span

CURB Single wall curb with EZ tab counterflash and mounting flange

INSULATION 1 inch polystyrene in cover, 1 inch polyiso around curb or optional 2 inch polyiso in cover and curb; R-12, specify -IRR

GASKET Extruded EPDM adhesive backed gasket seal continuous around cover

SPRING/HINGE ASSEMBLY Zinc plated steel tamper-proof hinges contained within spring assembly, includes steel compression springs

HOLD OPEN ARM Zinc plated steel automatic hold open arm with red vinyl grip handle locks cover in open position

LATCH Zinc plated steel latch with exterior and interior turn handles and padlock hasps; 90psf wind uplift for lengths >60 inch

FINISHES




Mill
Aluminum



2B Matte
Stainless Steel



ANSI 70 Gray
Powder Coat

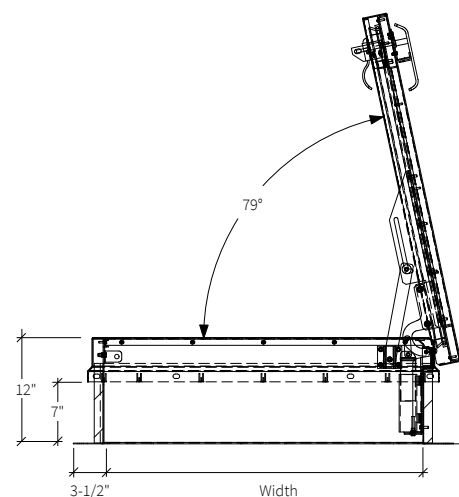

STANDARD MODELS

GALVANNEAL STEEL RED	GALVANNEAL STEEL WHITE	ALUMINUM	SIZE (IN.)	ACCESS
RHPG30X72S1T	RHPW30X72S1T	RHPA30X72S1T	30 x 72	Ship Stair or Alternating Tread
RHPG30X77S1T	RHPW30X77S1T	RHPA30X77S1T	30 x 77	Ship Stair or Alternating Tread
RHPG30X96S1T	RHPW30X96S1T	RHPA30X96S1T	30 x 96	Service Stair
RHPG36X96S1T	RHPW36X96S1T	RHPA36X96S1T	36 x 96	Service Stair

Additional sizes and options available, call for more information.

ThermalMAX™

ROOF HATCH

The ThermalMAX Roof Hatch sets the new standard for thermally efficient roof hatches. Designed with a thermal break to keep cool-cool and hot-hot, this hatch boasts an R-20.3 insulation rating making it today's most energy efficient hatch.

FEATURES

THERMALLY BROKEN Designed with a thermal break to stop the transfer of heat and cold.

ENHANCED INSULATION Three inch foil faced polyiso insulation provides a thermally efficient design to help maintain building envelope integrity; R-20+.



DETAILS

MATERIAL Aluminum: 11 gauge, mill finish or High Reflectance White powder coat

COVER Formed metal cover withstands a live load of 40psf with a max deflection of 1/150 the span

CURB Single wall curb with railing ready EZ tab counterflash and mounting flange

INSULATION 3 inch single layer foil faced polyiso in curb and cover; R-20.3

GASKET Extruded EPDM adhesive backed acoustic gasket seal, continuous around cover and an additional thermal break gasket incorporated into the curb to ensure a continuous seal

SPRING Gas spring with integrated damper for smooth, controlled lift assistance

HINGE Heavy-duty pintle hinge with stainless steel hinge pin

HOLD OPEN ARM Zinc plated steel automatic hold open arm with red vinyl grip handle locks cover in open position

LATCH Zinc plated steel slam latch with exterior and interior turn handle and padlock hasps; 20psf wind uplift for lengths ≤ 60 inches

PULL HANDLE Interior safety pull down handle, yellow powder coat

STANDARD MODELS

ALUMINUM	SIZE (IN.)	DOOR	CURB	ACCESS
RHTA36X30S1T	36 x 30	Single	Single Wall	Ladder
RHTA36X36S1T	36 x 36	Single	Single Wall	Ladder
RHTA48X48S1T	48 x 48	Single	Single Wall	Ladder
RHTA30X54S1T	30 x 54	Single	Single Wall	Ship Stair or Alternating Tread
RHTA30X96S1T	30 x 96	Single	Single Wall	Service Stair


FINISHES



Mill
Aluminum



High Reflectance White
Powder Coat

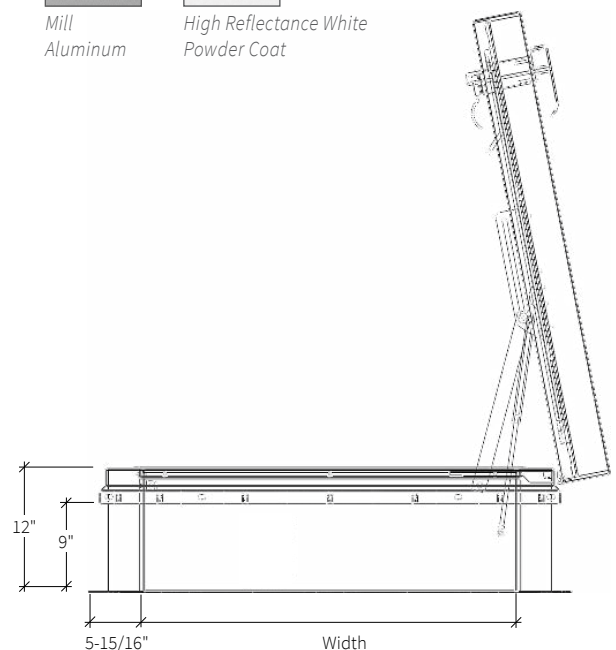

SunLit™

ROOF HATCH

Providing natural daylighting, the SunLit Roof Hatch is engineered with a translucent dome cover that is ideal for use in commercial buildings, retail, schools and more.

FEATURES

POLYCARBONATE DOME Add the traditional look of a domed skylight with 1/8 inch thick UV coated polycarbonate available in clear, white or bronze colors.

OPTIONAL DOUBLE DOME Increase impact and thermal resistance with double glazed polycarbonate domes.

OPTIONAL INSULATION Add an additional 2 inches of polyiso insulation in the curb; specify -IRR.



DETAILS

COVER Formed aluminum, 11 gauge, mill finish, metal cover with 1/8 inch clear polycarbonate, UV coated dome

CURB Single wall curb with EZ tab counterflash and mounting flange

- Aluminum: 11 gauge, mill finish
- Steel: 14 gauge galvalume, ANSI 70 Gray powder coat

INSULATION 1 inch fiberglass in cover, 1 inch polyiso around curb

GASKET Extruded EPDM adhesive backed gasket seal continuous around cover

SPRING/HINGE ASSEMBLY Zinc plated steel tamper-proof hinges contained within spring assembly, includes steel compression springs

HOLD OPEN ARM Zinc plated steel automatic hold open arm with red vinyl grip handle locks cover in open position

LATCH Zinc plated steel latch:

- 20psf wind uplift for lengths ≤60 inch with slam latch
- 90psf wind uplift for lengths >60 inches with 2-point rotary latch


FINISHES



Mill
Aluminum



ANSI 70 Gray
Powder Coat

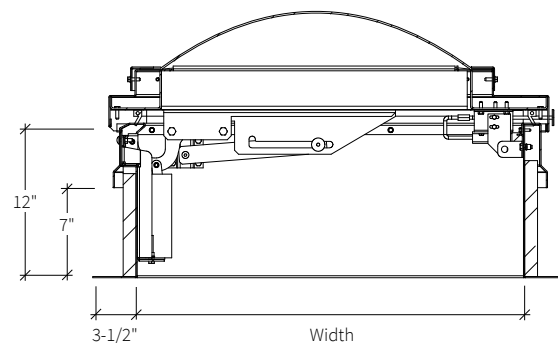

STANDARD MODELS

ALUMINUM	STEEL + ALUMINUM	SIZE (IN.)	ACCESS	DOOR	CURB
RHLA36X30S1P	RHLB36X30S1P	36 x 30	Ladder	Single	Single Wall
RHLA36X36S1P	RHLB36X36S1P	36 x 36	Ladder	Single	Single Wall

Additional sizes and options available, call for more information.

Security

ROOF HATCH

Designed for applications with heightened security, Nystrom's Security Roof Hatch is constructed of heavy-duty materials and the option for security grade locks. Ideal for prisons, banks, water treatment facilities and other high security buildings.

FEATURES

SECURITY GRADE MATERIAL Deter forced entry with extra heavy-duty top security grade roof hatches. Constructed of 3/16 inch steel or 1/4 inch aluminum.

OPTIONAL LOCKS Add essential security upgrades to your rooftop access with detention or mortise locks.

OPTIONAL VIEWPORT Gain visibility with the optional bulletproof viewport on roof hatch cover. Ideal for use in prisons and wastewater treatment facilities.



DETAILS

MATERIAL

- Aluminum: 1/4 inch, mill finish
- Steel: 3/16 inch, ANSI 70 Gray powder coat

COVER Formed metal cover with liner, stiffened to withstand a live load of 40psf with a max deflection of 1/150 the span

CURB Single wall curb with EZ tab counterflash and mounting flange

INSULATION 1 inch polystyrene in cover, 1 inch polyiso around curb

GASKET Extruded EPDM adhesive backed gasket seal, continuous around cover

SPRING/HINGE ASSEMBLY Zinc plated steel tamper-proof hinges contained within spring assembly, includes steel compression springs

HOLD OPEN ARM Zinc plated steel automatic hold open arm with red vinyl grip handle locks cover in open position

LATCH Zinc plated steel latch with exterior and interior turn handles and padlock hasp


FINISHES



Mill
Aluminum



ANSI 70 Gray
Powder Coat

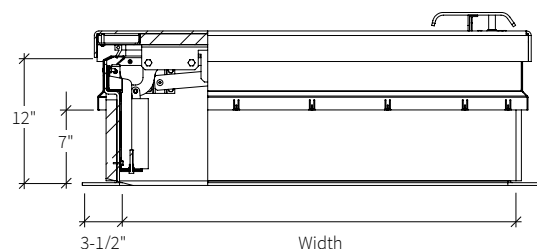

STANDARD MODELS

GALVANIZED STEEL	ALUMINUM	STEEL + ALUMINUM	SIZE (IN.)	ACCESS	DOOR	CURB
RHSG36X30S1T	RHSA36X30S1T	RHSB36X30S1T	36 x 30	Ladder	Single	Single Wall
RHSG36X36S1T	RHSA36X36S1T	RHSB36X36S1T	36 x 36	Ladder	Single	Single Wall
RHSG30X54S1T	RHSA30X54S1T	RHSB30X54S1T	30 x 54	Ship Stair	Single	Single Wall

Additional sizes and options available, call for more information.

Hurricane Hatch™

ROOF HATCH

Built to withstand nature's toughest storms, Nystrom's Hurricane Hatch™ is ideal for regions extreme wind conditions. This hatch was tested for wind-uplift, forced entry and air infiltration.

FEATURES

INDUSTRY'S BEST Tested for small and large missile impact - Class IV (TAS 201-94), Air Pressure & Water Penetration (TAS 202-94), and Cyclic Wind Pressure Loading (TAS 203-94).

NEW LARGER SIZES Miami-Dade Approved configurable sizes available up to a maximum opening of 20 ft² area; industry's largest 30 inches by 96 inches.



DETAILS

MATERIAL

- Aluminum 11 gauge, mill finish
- Steel 14 gauge galvalume, ANSI 70 Gray powder coat

COVER Formed metal cover with liner, stiffened to withstand a live load of 40psf with a max deflection of 1/150 of the span

CURB Single wall curb with EZ tab counterflash and mounting flange

INSULATION 1 inch polyiso R-6 in curb, 1 inch polystyrene in cover

GASKET Extruded EPDM adhesive backed gasket seal continuous around cover

HOLD OPEN ARM Zinc plated steel automatic hold open arm locks cover in open position

LATCH Zinc plated steel latch with exterior and interior turn handles and padlock hasps.

CERTIFICATION Florida Product Approved and Miami-Dade County

2-POINT LATCH

SPRING / HINGE ASSEMBLY Zinc plated steel tamper-proof hinges contained within spring assembly, includes steel compression springs

SINGLE POINT LATCH

SPRING Gas spring with damper for smooth, controlled lift assistance

HINGE Heavy-duty pintle hinge with stainless steel hinge pin

PULL HANDLE Interior safety pull down handle, yellow powder coat

FINISHES



Mill



ANSI 70 Gray Powder Coat




High Reflectance White Powder Coat -FP44

STANDARDS SIZES

GALVANIZED STEEL	ALUMINUM	SIZE (IN.)	ACCESS	DOOR	CURB	LATCH
RHHG30X54S1T	RHHA30X54S1T	30 x 54	Ship Stair	Single	Single Wall	Single Point
RHHG30X72SIT	RHHA30X72SIT	30 x 72	Ship Stair	Single	Single Wall	2-Point
RHHG30X96SIT	RHHA30X96SIT	30 x 96	Ship Stair	Single	Single Wall	2-Point
RHHG36X30S1T	RHHA36X30S1T	36 x 30	Ladder	Single	Single Wall	Single Point
RHHG36X36SIT	RHHA36X36SIT	36 x 36	Ladder	Single	Single Wall	Single Point
RHHG36X72SIT	RHHA36X72SIT	36 x 72	Ship Stair	Single	Single Wall	2-Point
RHHG48X48SIT	RHHA48X48SIT	48 x 48	Ladder	Single	Single Wall	Single Point

Additional sizes and options available, call for more information.

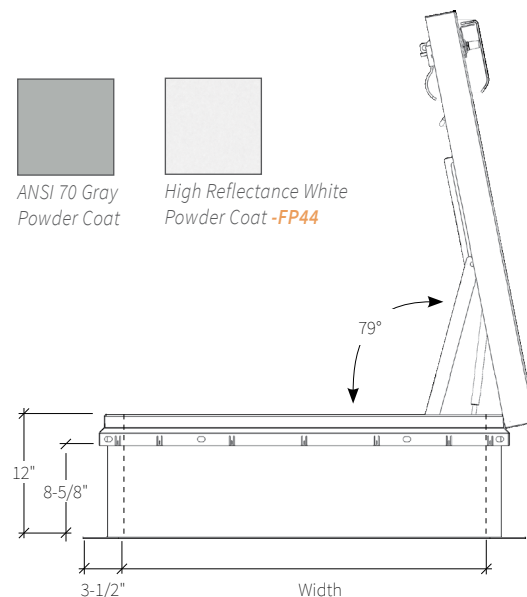

Equipment


HATCH

Nystrom's Equipment Roof Hatch is engineered to accommodate extra large equipment access through roofs. With options like curb mounting and varied curb heights Nystrom is sure to meet your equipment servicing needs.

FEATURES

LARGEST CLEAR OPENING Industry's largest clear opening allows equipment up to 160 by 240 inches to be installed and serviced through the roof of your building.

STAINLESS STEEL MATERIAL Upgrade to corrosion resistant Type 304 stainless steel for corrosive environments such as waste water treatment facilities and coastal areas.

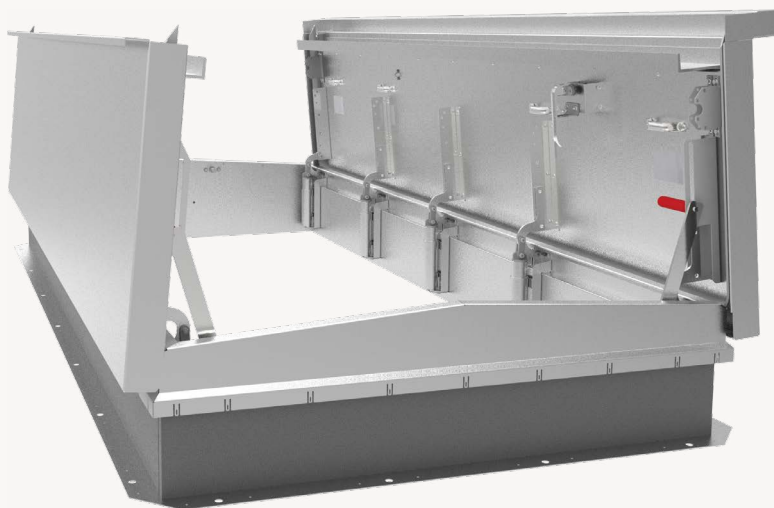

DETAILS

MATERIAL

- Aluminum: 11 gauge, mill finish
- Steel: 14 gauge galvalume, ANSI 70 Gray powder coat
- Stainless Steel: Type 304 14 gauge, 2B matte finish

COVER Formed metal cover withstands a live load of 40psf with a max deflection of 1/150 the span

CURB Single wall curb with EZ tab counterflash and mounting flange

INSULATION 1 inch polystyrene in cover, 1 inch polyiso around curb

GASKET Extruded EPDM adhesive backed gasket seal continuous around cover

SPRING/HINGE ASSEMBLY Zinc plated steel tamper-proof hinge contained within spring assembly, includes steel compression spring

HOLD OPEN ARM Zinc plated steel automatic hold open arm with red vinyl grip handle locks cover in open position

LATCH Zinc plated steel latch with exterior and interior turn handles and padlock hasps

FINISHES




Mill



ANSI 70 Gray
Powder Coat



2B Matte
Stainless Steel

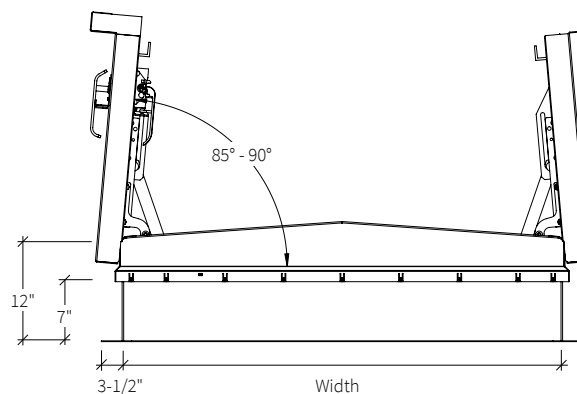

STANDARD MODELS

GALVANIZED STEEL	ALUMINUM	STAINLESS STEEL	SIZE (IN.)	DOOR	CURB
RHEG48X48S1T	RHEA48X48S1T	RHES48X48S1T	48 x 48	Single	Single Wall
RHEG60X60D1T	RHEA60X60D1T	RHES60X60D1T	60 x 60	Double	Single Wall
RHEG72X72D1T	RHEA72X72D1T	RHES72X72D1T	72 x 72	Double	Single Wall
RHEG60X120D1T	RHEA60X120D1T	RHES60X120D1T	60 x 120	Double	Single Wall

Additional sizes and options available, call for more information.

Safety Railing

ROOF HATCH FALL PROTECTION

Nystrom's OSHA compliant Safety Railing is ideal for new and retrofit applications. The safety railing mounts to the existing roof hatch curb counterflash without penetrating the membrane or curb.

FEATURES

EASY FIELD INSTALLATION No field cutting required as rails are cut to exact size. Easy assembly fittings and quick mounting on counterflash using a patented nut backing plate.

SELF-CLOSING GATE Designed to automatically close, the gate is constructed with spring loaded hinges to protect against falls.



DETAILS

MATERIAL Rails and posts, aluminum, 1-1/4 inch ID (1.66 inch OD) Schedule 40 pipe

FINISH Safety Yellow Powder Coat standard or mill option

FITTINGS Cast aluminum alloy with set screw hold


MOUNTING BRACKETS 3/16 inch steel, zinc plated with nut backing plate

HARDWARE Hex head bolts 3/8 - 16 by 3/4 inch zinc plated steel

EXIT Must be kept closed when roof hatch door is open

- Self-Closing Gate: Aluminum, 1-1/4 inch ID (1.66 inch OD) Schedule 40 pipe, self-closing with coil spring
- Chain: 3/16 inch zinc plated steel link chain with spring clip ends

COMPLIANCE OSHA 29 CFR 1910.29, 1910.28, 1910.23, 1926.502, and 1926.501

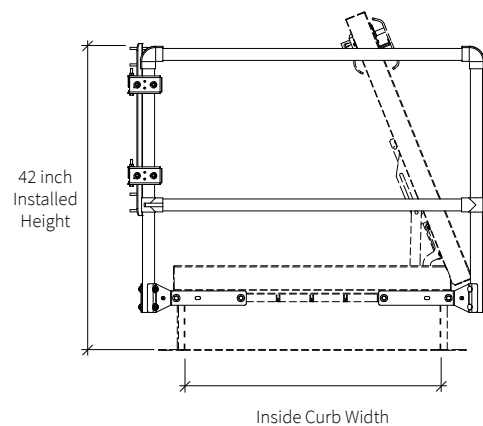

STANDARD MODELS

GATE CLOSURE		CHAIN CLOSURE		SIZE (IN.)	ACCESS
YELLOW	MILL	YELLOW	MILL		
SRCA30X54SG	SRCA30X54SG	SRCA30X54SC	SRCA30X54SC	30 x 54	Side
SRCA30X72SG	SRCA30X72SG	SRCA30X72SC	SRCA30X72SC	30 x 72	Side
SRCA36X30FG	SRCA36X30FG	SRCA36X30FC	SRCA36X30FC	36 x 30	Front
SRCA36X36SG	SRCA36X36SG	SRCA36X36FC	SRCA36X36FC	36 x 36	Front
SRCA30X96SG	SRCA30X96SG	SRCA30X96SC	SRCA30X96SC	30 x 96	Side
SRCA48X48FG	SRCA48X48FG	SRCA48X48FC	SRCA48X48FC	48 x 48	Front

Additional sizes available, call for more information.

THERMALMAX MODELS

GATE CLOSURE		SIZE (IN.)	ACCESS
YELLOW	MILL		
SRBAY30X54SG	SRBA30X54SG	30 x 54	Side
SRBAY36X30FG	SRBA36X30FG	36 x 30	Front
SRBAY36X36FG	SRBA36X36SG	36 x 36	Front
SRBAY30X96SG	SRBA30X96SG	30 x 96	Side
SRBAY48X48FG	SRBA48X48FG	48 x 48	Front

Safety Post

ROOF HATCH FALL PROTECTION

The Safety Post is designed to extend 42 inches above a landing platform to aid safe ladder access through a roof hatch. The spring assisted telescoping design mounts to the top two rungs of a fixed vertical ladder.



DETAILS

MATERIAL 1-1/2 inch by 1-1/2 inch by 1/8 inch high strength square tubing with a pull-up loop provided at the upper end to facilitate raising of post.

- Steel: yellow powder coat paint or hot dip galvanized
- Stainless Steel: Type 304, mill
- Aluminum: Mill

BALANCING SPRING Stainless steel constant force spring

HARDWARE Type 316 stainless steel


MODELS

MODEL	MATERIAL	FINISH
SPY	Steel	Powder Coat, Yellow
SPG	Steel	Hot Dip Galvanized
SPA	Aluminum	Mill
SPS	Stainless Steel	Mill

Safety Grab Bar

ROOF HATCH FALL PROTECTION

The Safety Grab Bar is engineered to provide safe access through roof hatches. The grab bar mounts to a corner section through the curb counterflashing.

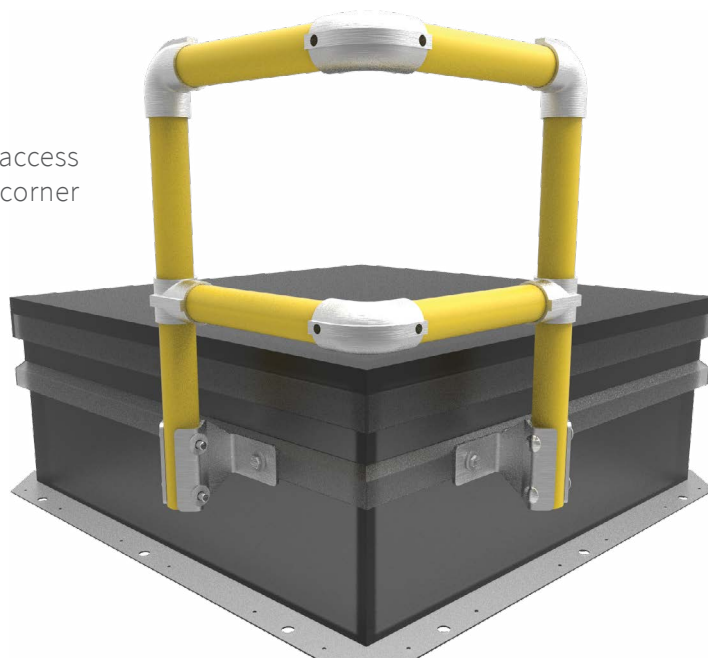

DETAILS

MATERIAL Rails and posts, aluminum, 1-1/4 inch ID (1.66 inch OD) Schedule 40 pipe

FINISH Powder Coat, Safety Yellow

FITTINGS Cast aluminum alloy with set screw hold

MOUNTING BRACKETS 3/16 inch steel, zinc plated with nut backing plate

HARDWARE Hex head bolts 3/8 inch - 16 by 3/4 inch zinc plated steel

MODELS

MODEL	MATERIAL	FINISH
SGBAY	Aluminum	Powder Coat, Safety Yellow

Safety Yellow Powder Coat shown

SmokEscape™ (Single Door)

SMOKE VENT

Nystrom's Single Door SmokEscape Smoke Vent, engineered with a metal cover, is ideal for factory, storage and warehouse occupancies, and hoistways. The single door smoke vent offers the largest effective vent area.

FEATURES

GREATER EFFECTIVE VENT AREA Reduce the number of smoke vents required on the roof with the industry's largest 48 x 96 single door smoke vent.

OPTIONAL LOUVERED CURB Add additional ventilation with louvered curbs. Ideal for use in elevator shafts and hoistways.



DETAILS

MATERIAL

- Aluminum: 11 gauge, mill finish
- Steel: 14 gauge, ANSI 70 Gray powder coat

COVER Formed metal cover with liner, internally stiffened to withstand a live load of 40psf

CURB Single wall curb with EZ tab counterflash and mounting flange

INSULATION 1 inch Polyiso R-6 in cover and around curb.

GASKET Extruded EPDM adhesive backed gasket seal, continuous around cover


HINGE Heavy-duty pintle hinge with stainless steel hinge pins

SPRING Gas spring with damper opens cover against 10psf snow load

HOLD OPEN ARM Zinc plated steel automatic hold open arm locks cover in open position

LATCH Zinc plated steel rotary latch designed to hold covers closed against 30psf wind uplift. Opens manually by external and internal pull cables. Opens automatically with a fusible link at standard temperature 165°F.

CERTIFICATIONS UL 793 Listed, FM 4430 Approved

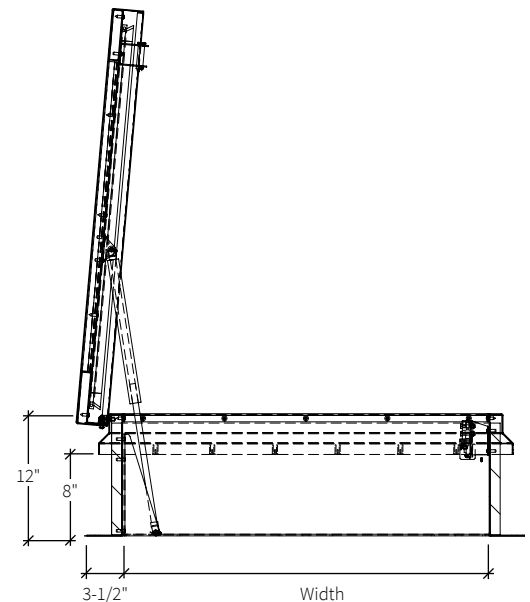

ORDER GUIDE

BASE	MATERIAL	WIDTH	X	LENGTH	DOOR	CURB	ELECTRIC	LINK TEMP (°F)	CLOSING	—	OPTIONS
SVS			X							—	
	A Aluminum Curb & Cover	Standard Sizes (W x L)			S Single Door	1 Single Wall	N No Electrical	165 350	R Rooftop Close		OP1 Door Position Sensor
		30" x 30"	36" x 30"	36" x 36"		2 Double Wall	L 24VDC/24VAC	212 360			
	B Galvanneal Curb / Aluminum Cover	48" x 48"	48" x 72"	48" x 96"		3 Curb Mount	H 110VAC / 240VAC	280 450			
	G Galvanneal Curb & Cover	Additional size options also available.									SFM FM Labeled

SmokEscape™ (Double + Quad Door)


SMOKE VENT

The standard Double and Quad Door SmokEscape Smoke Vent, engineered with metal covers, is ideal for factory, storage and warehouse occupancies.

FEATURES

SECURE CLOSURE The reliable rotary latch has been third party independently tested to hold smoke vent covers closed against a 135psf wind uplift.

OPTIONAL 2 INCH INSULATION Optimize energy efficiency and upgrade thermal insulation to R-12 with 2 inch of Polyiso in the cover and curb while maintaining UL Listing.

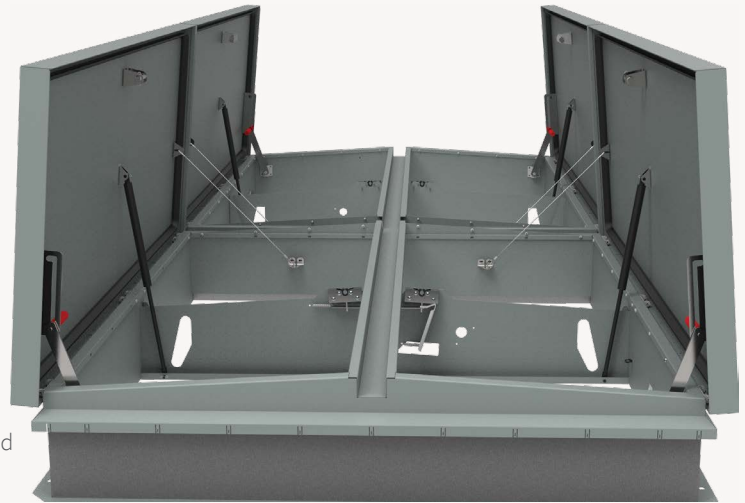

DETAILS

MATERIAL

- Aluminum: 11 gauge, mill finish
- Steel: 14 gauge, ANSI 70 Gray powder coat

COVER Formed metal cover with liner, internally stiffened to withstand a live load of 40psf

CURB Single wall curb with EZ tab counterflash and mounting flange

INSULATION 1 inch Polyiso R-6 in cover and around curb

GASKET Extruded EPDM adhesive backed gasket seal, continuous around cover


HINGE Heavy-duty pintle hinge with stainless steel hinge pins

SPRING Gas spring with damper opens cover against 10psf snow load.

HOLD OPEN ARM Zinc plated steel automatic hold open arm locks cover in open position.

LATCH Zinc plated steel rotary latch designed to hold covers closed against 135psf wind uplift. Opens manually by external and internal pull cables. Opens automatically with a fusible link at standard temperature 165°F.

CERTIFICATIONS UL 793 Listed, FM 4430 Approved

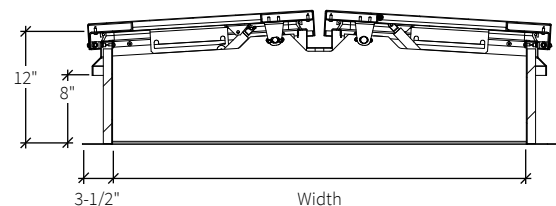

ORDER GUIDE

BASE	MATERIAL	WIDTH	X	LENGTH	DOOR	CURB	ELECTRIC	LINK TEMP (°F)	CLOSING	—	OPTIONS
SVS			X							—	
	A Aluminum Curb & Cover	Standard Sizes (W x L)			D Double Door	1 Single Wall	N No Electrical	165 350	R Rooftop Close	*Voids UL	OP1 Door Position Sensor
		48" x 48"	48" x 72"	48" x 96"	Q Quad Door	2 Double Wall	L 24VDC/24VAC	212 360	W Manual Winch		B Burglar Bars/Fall Protection Screen
	B Galvanneal Curb / Aluminum Cover	60" x 60"	60" x 96"	60" x 120"		3 Curb Mount	H 110VAC / 240VAC	280 450	A Linear Actuator*		SFM FM Labeled
	G Galvanneal Curb & Cover	Additional size options also available.									

SunLit™ eco


SMOKE VENT

The SunLit eco sets the new standard for UL793 listed daylighting smoke vents. Now available with multiple curb options, burglar bars, safety railing ready and other security options.

FEATURES

INNOVATIVE DESIGN Innovative patent-pending design means better performance, easier install and lower cost.

NATURAL DAYLIGHTING Add the traditional look of a domed skylight and added sustainability benefit of natural daylighting.

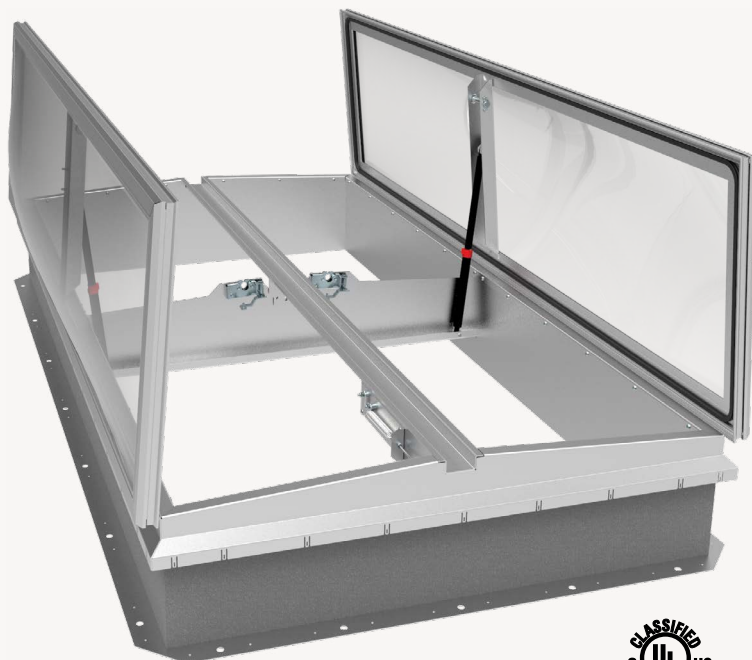

DETAILS

COVER Extruded aluminum frame, 11 gauge, mill finish, with polycarbonate dome to withstand a live load of 40psf.

CURB Single wall curb with apron mount

GASKET Extruded EPDM adhesive backed gasket seals

HINGE Patent-pending extruded hinge, continuous

SPRING Gas spring damper opens cover against 10psf snow load

HOLD OPEN ARM Hold open arm integrated into the gas spring, locks cover in fully open position


LATCH Zinc plated steel rotary latch designed to hold covers closed against 90psf wind uplift. Opens manually by external and internal pull cables.

OPERATION Opens automatically with fusible link and manual pull handles.

SIZES

- Double Door: 48 inches by 48 inches to 48 inches by 96 inches
- Quad Door: 48 inches by 96 inches to 48 inches by 192 inches

CERTIFICATIONS UL 793 Listed

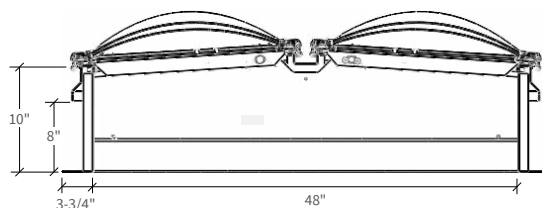

ORDER GUIDE

BASE	WIDTH	X	LENGTH	DOOR	CURB	ELECTRIC	LINK TEMP (°F)	CLOSING	—	OPTIONS
SVEA		X							—	
	Standard Sizes (W x L) 30" x 30" 36" x 30" 36" x 36" 48" x 48" 48" x 72" 48" x 96"			D Double Leaf Q Quad Leaf	1 Single Wall 2 Double Wall 3 Curb Mount 4 Double Wall no Counterflash 5 Double Wall / Apron Mount 6 Low Profile Curb Mount*	N No Electrical L 24VDC/24VAC H 110VAC / 240VAC	165 350 212 360 280 450	R Rooftop Close		Dome, Polycarb. LPW White LPC Clear Double Dome, Polycarb. LPWW White/White LPCW Clear/White Multiwall LMC Clear LMZ Bronze LMB Blue LMG Green

Additional size options also available.

*Note: Low profile curb mount has limited options. Call for more information.

SunLit™ (Single Door)

SMOKE VENT

Providing natural daylighting, the Single Door SunLit Smoke Vent is engineered with a translucent cover. This smoke vent includes a clear or color tinted multiwall panel or optional domes that are ideal for use in factory, storage and warehouse commercial buildings.

FEATURES

MULTIWALL LIGHT TRANSMISSION Add optional color panels (pg. 25) to change natural daylighting characteristics.

OPTIONAL DOME Add the traditional look of a domed skylight with 1/8 inch thick UV coated polycarbonate available in clear, white or bronze colors.



DETAILS

COVER Extruded aluminum frame, 11 gauge, mill finish, with 5/8 inch 3 layer structural multiwall R-3 in white polycarbonate. Cover withstands a live load of 40psf.

CURB Single wall curb with EZ tab counterflash and mounting flange

- Aluminum: 11 gauge, mill finish
- Steel: 14 gauge, ANSI 70 Gray powder coat

• **INSULATION** 1 inch Polyiso R-6 around curb perimeter

GASKET Extruded EPDM adhesive backed gasket seal, continuous around cover


HINGE Heavy-duty pintle hinge with stainless steel hinge pin

SPRING Gas spring damper opens cover against 10psf snow load

HOLD OPEN ARM Zinc plated steel automatic hold open arm locks cover in open position

LATCH Zinc plated steel rotary latch designed to hold covers closed against 30psf wind uplift. Opens manually by external and internal pull cables.

CERTIFICATIONS UL 793 Listed

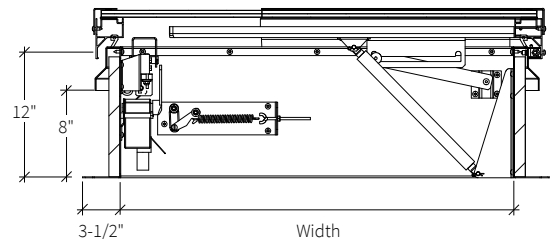

ORDER GUIDE

BASE	MATERIAL	WIDTH	X	LENGTH	DOOR	CURB	ELECTRIC	LINK TEMP (°F)	CLOSING	—	OPTIONS
SVL			X							—	
	A Aluminum Curb & Cover	Standard Sizes (W x L)			S Single Door	1 Single Wall	N No Electrical	165	350	R Rooftop Close	Dome, Polycarb. LPW White LPC Clear
		30" x 30"	36" x 30"	36" x 36"				212	360		
	B Galvanneal Curb / Aluminum Cover	48" x 48"	48" x 72"	48" x 96"				280	450		
		Additional size options also available.				2 Double Wall	L 24VDC/24VAC			W Manual Winch	Double Dome, Polycarb. LPWW White/White LPCW Clear/White
						3 Curb Mount	H 110VAC / 240VAC				
											Multiwall LMC Clear LMZ Bronze LMB Blue LMG Green

SunLit™ (Double + Quad Door)


SMOKE VENT

The Double and Quad Door SunLit Smoke Vent is engineered with translucent covers using polycarbonate for the added sustainability benefit of natural daylighting. With options like color panels, and electrical operation, Nystrom is sure to meet your building sustainability and fire and life safety needs.

FEATURES

MULTIWALL LIGHT TRANSMISSION Add optional color panels (pg. 25) to change natural daylighting characteristics.

OPTIONAL DOME Add the traditional look of a domed skylight with 1/8 inch thick UV coated polycarbonate available in clear, white or bronze colors.

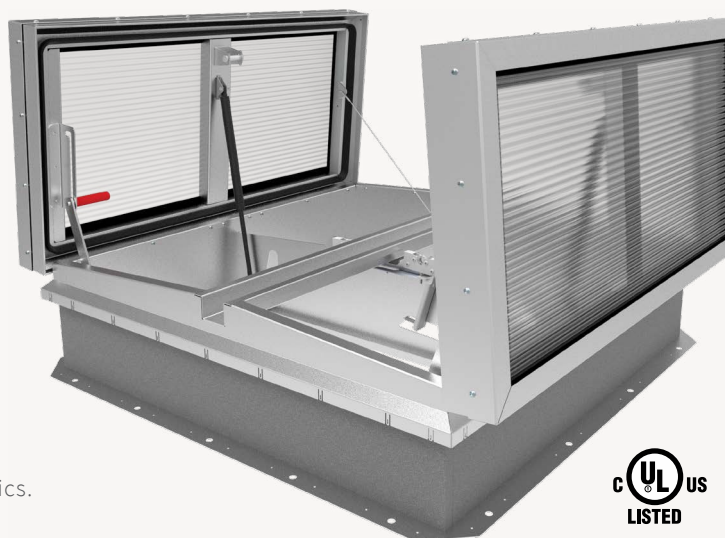

DETAILS

COVER Extruded aluminum frame, 11 gauge, mill finish, with 5/8 inch 3 layer structural multiwall R-3 in white polycarbonate. Cover withstands a live load of 40psf.

CURB Single wall curb with EZ tab counterflash and mounting flange

- Aluminum: 11 gauge, mill finish
- Steel: 14 gauge, ANSI 70 Gray powder coat

INSULATION 1 inch Polyiso R-6 around curb perimeter

GASKET Extruded EPDM adhesive backed gasket seal, continuous around cover


HINGE Heavy-duty pintle hing with stainless steel hinge pin

SPRING Gas spring damper opens cover against 10psf snow load

HOLD OPEN ARM Zinc plated steel automatic hold open arm locks cover in open position

LATCH Zinc plated steel rotary latch designed to hold covers closed against 90psf wind uplift. Opens manually by external and internal pull cables.

CERTIFICATIONS UL 793 Listed

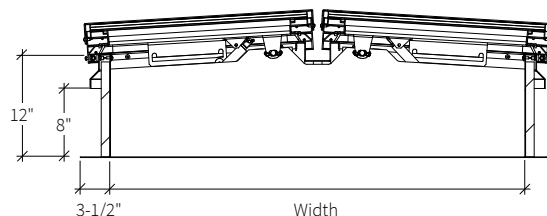

Order Guide

BASE	MATERIAL	WIDTH	X	LENGTH	DOOR	CURB	ELECTRIC	LINK TEMP (°F)	CLOSING	—	OPTIONS
SVL			X							—	
	A Aluminum Curb & Cover	Standard Sizes (W x L)			D Double Door	1 Single Wall	N No Electrical	165 350	R Rooftop Close	A Linear Actuator* <i>*Voids UL</i>	Dome, Polycarb. LPW White LPC Clear Double Dome, Polycarb. LPWW White/White LPCW Clear/White Multiwall LMC Clear LMZ Bronze LMB Blue LMG Green
	B Galvanneal Curb / Aluminum Cover	48" x 48"	48" x 72"	48" x 96"	Q Quad Door	2 Double Wall	L 24VDC/24VAC	212 360	W Manual Winch		
		60" x 60"	60" x 96"	60" x 120"		3 Curb Mount	H 110VAC / 240VAC	280 450			
		72" x 72"	72" x 96"								
		<i>Additional size options also available.</i>									

AcousticMAX™ (STC 48/STC 50)

SMOKE VENT

Block the intrusion of exterior environmental noise with Nystrom's AcousticMAX Smoke Vent. Perfect for theaters and performing arts centers; every detail is designed with precision.

FEATURES

SUPERIOR THERMAL PERFORMANCE The BSVY AcousticMAX R-14 energy-efficient smoke vent is designed to save money with reduced heat loss.

INNOVATIVE SOUND CONTROL Designed to keep out unwanted noises ensuring acoustical integrity when all you want to hear is the performance.

PREFINISHED BLACK INTERIOR Eliminate field painting hassle with the prefinished interior that seamlessly integrates into the ceiling.



DETAILS

SOUND RATING(S) Independent third party tested to ASTM E90 and ASTM E1332

- SVX: STC 48 - OITC 36
- SVY: STC 50 - OITC 39

MATERIAL 14 gauge steel; powder coat

FINISH ANSI 70 Gray exterior cover with black interior liner and black curb

COVER Metal with liner, withstands a live load of 40psf with a max deflection of 1/150 the span

CURB Double wall curb with EZ tab counterflash and mounting flange

INSULATION Mineral wool and sound mat in cover and curb

- SVX: Total R-10
- SVY: Total R-14

GASKET Extruded EPDM adhesive backed gasket seals

HINGE Stainless steel heavy duty pintle hinge


SPRING Gas spring with damper opens cover against 10psf snow load

HOLD OPEN ARM Zinc plated steel automatic hold open arm locks cover in open position

LATCH Zinc plated steel rotary latch designed to hold covers closed against 90psf wind uplift

OPERATION Opens automatically with a fusible link and manual pull handles

CERTIFICATIONS UL 793 Listed, FM 4430 Approved, and IBC 1207 Compliant (SVY only)

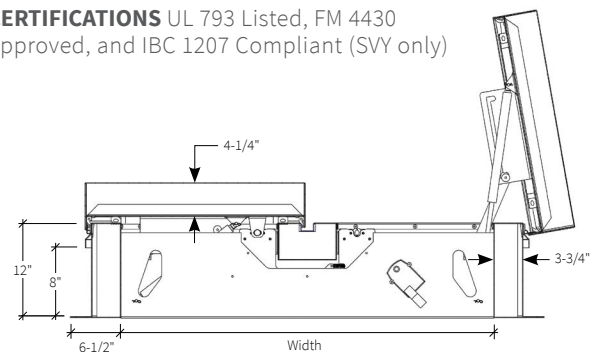

ORDER GUIDE

BASE	RATING	MATERIAL	WIDTH	X	LENGTH	DOOR	CURB	ELECTRIC	LINK TEMP (°F)	CLOSING	—	OPTIONS
SV		G		X							—	
	X STC 48 Y STC 50		Standard Sizes (W x L) 48" x 48" 48" x 72" 48" x 96" 60" x 60" 60" x 96" 60" x 120" 72" x 72" 72" x 96" Additional size options also available.			D Double Door Q Quad Door	2 Double Wall 3 Curb Mount	N No Electrical L 24VDC/24VAC H 110VAC / 240VAC	165 350 212 360 280 450	R Rooftop Close W Manual Winch A Linear Actuator*		OP1 Door Position Sensor B Burglar Bars
										*Voids UL		

Safety Railing


SMOKE VENT FALL PROTECTION

Nystrom's OSHA compliant Safety Railing is ideal for new and retrofit applications. The safety railing mounts to the existing smoke vent curb counterflash without penetrating the membrane or curb.

FEATURES

FALL PROTECTION In accordance with OSHA regulations, the safety railing is engineered to guard smoke vent openings to protect against falls.

EASY FIELD INSTALLATION No field cutting required as rails cut to exact size. Easy assembly fittings and quick mounting on counterflash.

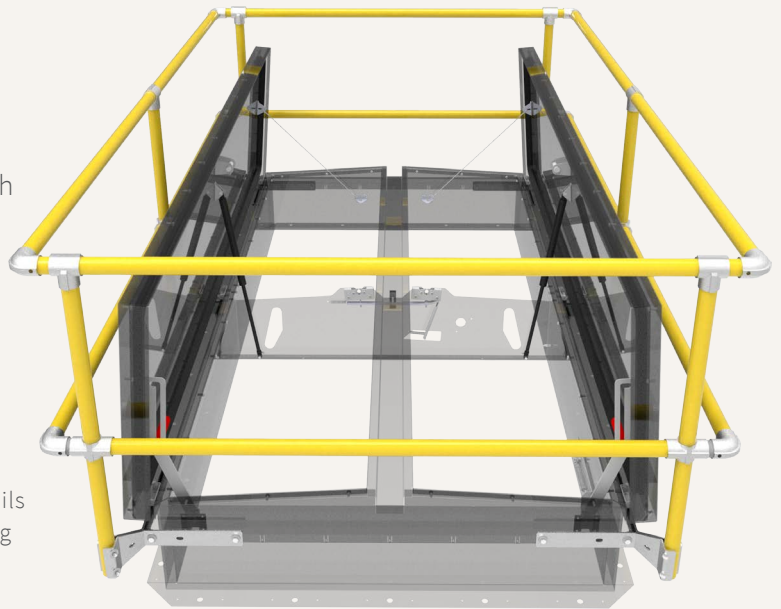

DETAILS

MATERIAL Rails and posts, aluminum, 1-1/4 inch ID (1.66 inch) Schedule 40 pipe


FINISH Powder Coat, Safety Yellow

FITTINGS Cast aluminum alloy with set screw hold

MOUNTING BRACKETS 3/16 inch steel, zinc plated with nut backing plate

HARDWARE Hex head bolts 3/8 inch - 16 x 3/4 inch zinc plated steel

COMPLIANCE OSHA 29 CFR 1910.29, 1910.28

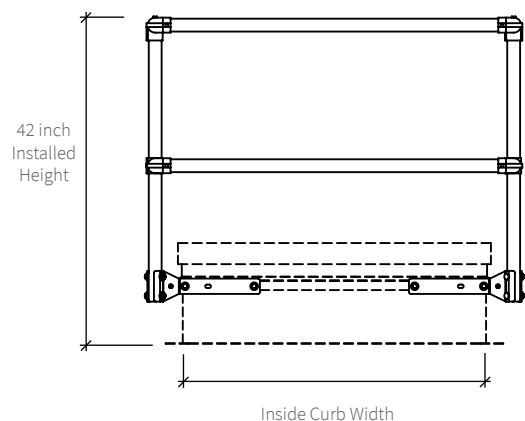

ORDER GUIDE

4-SIDED		2-SIDED	
MODEL	SIZE (IN.)	MODEL	SIZE (IN.)
SRVAY36X30NN	36 x 30	SRVAY48XNNTN	48
SRVAY36X36NN	36 x 36	SRVAY60XNNTN	60
SRVAY48X48NN	48 x 48	SRVAY72XNNTN	72
SRVAY48X96NN	48 x 96		
SRVAY60X96NN	60 x 96		
SRVAY60X120NN	60 x 120		
SRVAY60X144NN	60 x 144		
SRVAY72X144NN	72 x 144		

Burglar Bars

SMOKE VENT FALL PROTECTION

Nystrom's Burglar Bars, a smoke vent accessory, are designed for security and safety and to prevent unauthorized entry. Engineered for each smoke vent, these bars are available on new installations as a factory installed option.


DETAILS

MATERIAL Steel, 1/2 inch or 3/4 inch diameter

SPACING 6 inch by 6 inch, 6 inch by 12 inch or custom

ORDER GUIDE

MODEL	DIAMETER	SPACING
B1A	1/2"	6" x 12"
B1B	1/2"	6" x 6"
B2A	3/4"	6" x 12"
B2B	3/4"	6" x 6"

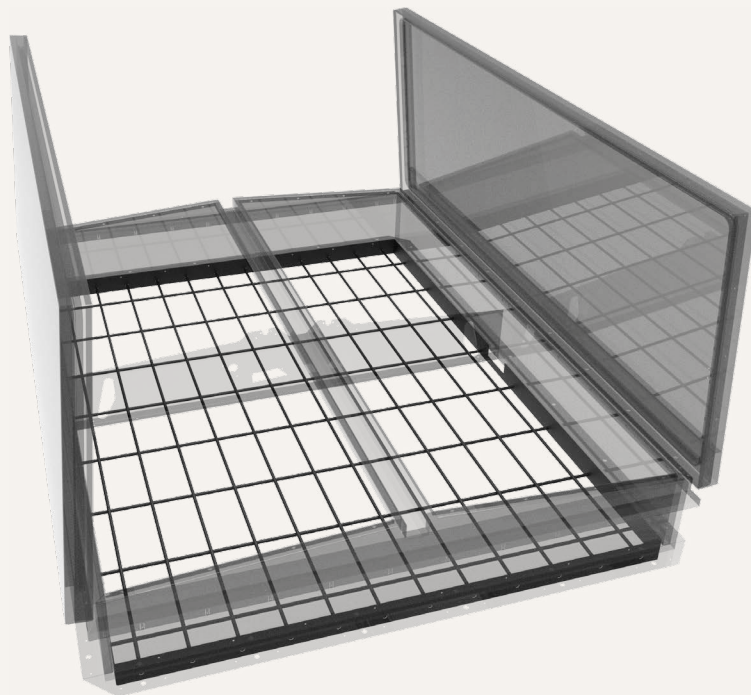

Screen

SMOKE VENT FALL PROTECTION

The Fall Protection Screen, a smoke vent safety product, is designed to aid in fall protection. This sturdy screen, spaced 4 inch apart with fully welded intersections is available on new installations as a factory install option on each smoke vent. Third party tested with a drop test of 400 pounds of 30 inch diameter sandbag from 42 inches.

DETAILS


MATERIAL Steel, 0.163 inch diameter

SPACING 4 inch by 4 inch

COMPLIANCE OSHA 1926.502c and 1910.28

ORDER GUIDE

MODEL	DIAMETER	SPACING
B3C	0.163"	4" x 4"

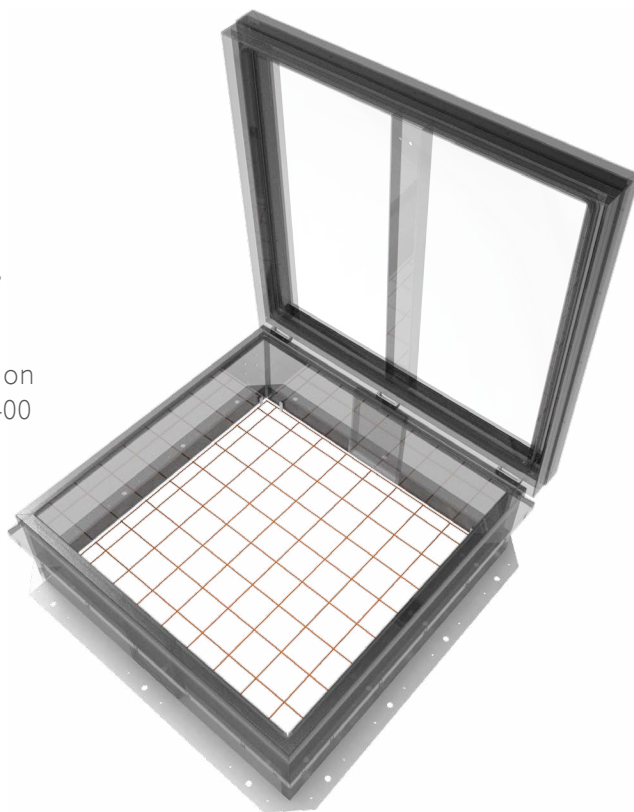

Weighted Base

GUARDRAIL FALL PROTECTION

The OSHA compliant portable railing system is designed to keep people safe while working on rooftops and other structures. No need for tie-off points and expensive safety equipment.

FEATURES

PORTABLE BASE The weighted base is designed to be portable and installed where permanent mounting is not an option

EASY INSTALLATION The posts and rails are easy to assemble and install.

COORDINATING COLORS The system comes with a standard powder coat finish that is available in a wide range of colors to match your building's exterior.



DETAILS

MATERIALS

- Weighted Base and Post Assembly: Steel, 1-1/4 inch ID (1.66 inch OD) Schedule 40 pipe
- Horizontal and Corner Rails: 1-5/8 inch by .065 inch Steel

FINISH Powder Coat


RAIL FASTENERS 3/8 inch - 16 by 1 inch zinc plated steel

COMPLIANCE OSHA 29 CFR 1910.28, 1910.29

MODELS

MODEL	DESCRIPTION	DIMENSION	MATERIAL + FINISH
GR-WBP-ASM-RN	Weighted Base and Post	26.875" x 46"	Steel, Powder Coat
GR-WBPR-004-RN	Fixed Rail*	4'	Steel Powder Coat
GR-WBPR-005-RN	Fixed Rail*	5'	Steel Powder Coat
GR-WBPR-008-RN	Fixed Rail*	8'	Steel Powder Coat
GR-WBPR-010-RN	Fixed Rail*	9'- 10"	Steel Powder Coat
GR-WBPR-ADJ-043-RN	Adjustable Rail*	2'-5" to 3'-9"	Steel Powder Coat
GR-WBPR-ADJ-070-RN	Adjustable Rail*	3'-9" to 5'-10"	Steel Powder Coat
GR-WBPR-ADJ-120-RN	Adjustable Rail*	5'-10" to 10'	Steel Powder Coat
GR-WB-AC	Adjustable Corner*		Steel Powder Coat

*Note: Rails and corners are sold in sets of 2. Rails include 2 rails, 1 post and weighted base. When ordering, please be sure to include 1 additional weighted base.

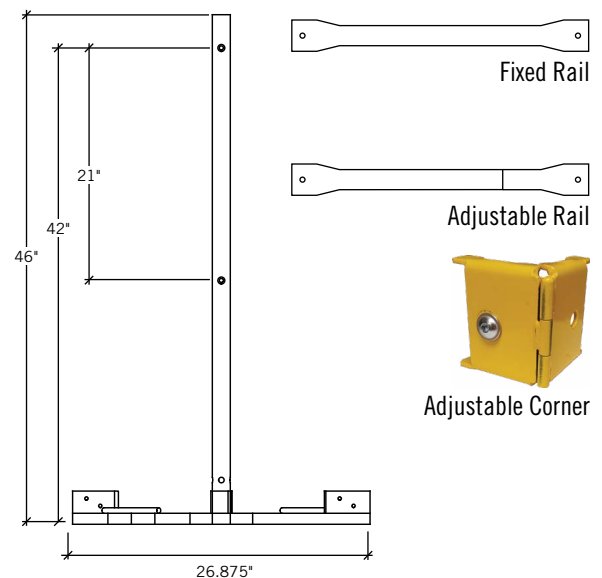

Perimeter

GUARDRAIL FALL PROTECTION

The OSHA compliant Permanent Guardrail system's unique bracket installs under the drip edge, coping cap, gravel stop or gutter system without penetrating the roofing system and allows for retro fit installations.

FEATURES

PERMANENT MOUNT The edge mounted guardrail system does not penetrate the roof membrane and installs under the coping and roof flashing.

EASY INSTALLATION The posts and rails are easy to assemble and install.

COORDINATING COLORS The system comes with a standard powder coat finish that is available in a wide range of colors to match your building's exterior.



DETAILS

MATERIALS

- Post and Bracket Assembly: Steel, 1-1/4 inch ID (1.66 inch OD) Schedule 40 pipe
- Horizontal and Corner Rails: 1-5/8 inch by .065 inch Steel

FINISH Powder Coat

STRUCTURAL FASTENERS

- Wood: RSS structural screws
- Concrete: Caliburn PH concrete pan head screw


RAIL FASTENERS 3/8 inch - 16 x 1 inch zinc plated steel

COMPLIANCE OSHA 29 CFR 1910.28, 1910.29


STANDARD MODELS

MODEL	DESCRIPTION	DIMENSION	MATERIAL + FINISH
FP-GRPLG	Edge Mount Post	42"	Steel, Powder Coat
FP-GRF60	Fixed Rail*	5'	Steel, Powder Coat
FP-GRF96	Fixed Rail*	8'	Steel, Powder Coat
FP-GRF118	Fixed Rail*	9'- 10"	Steel, Powder Coat
FP-GRA43	Adjustable Rail*	2'-5" to 3'-9"	Steel, Powder Coat
FP-GRA70	Adjustable Rail*	3'-9" to 5'-10"	Steel, Powder Coat
FP-GRA120	Adjustable Rail*	5'-10" to 10'	Steel, Powder Coat
FP-GRC12	Corner Rail*	12"	Steel, Powder Coat


*Note: Rails and corners are sold in sets of 2.

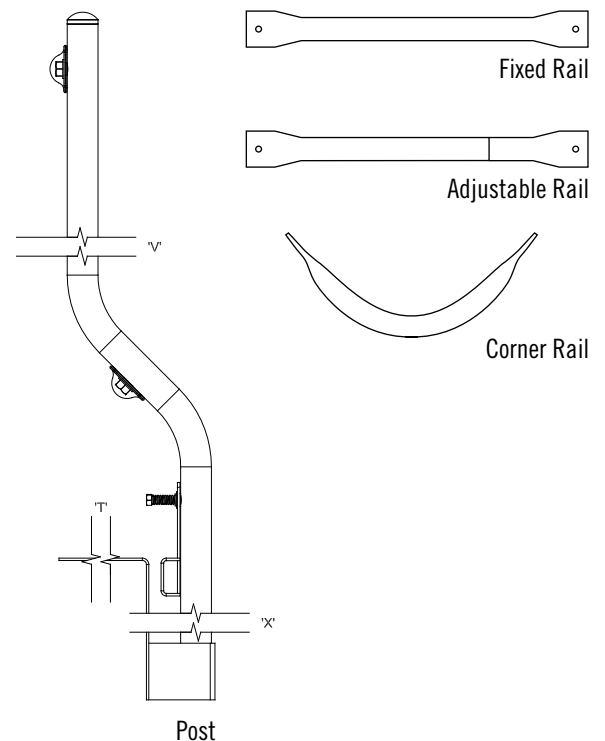


Access




Ladder



Ship Stair



Alternating Tread Stair

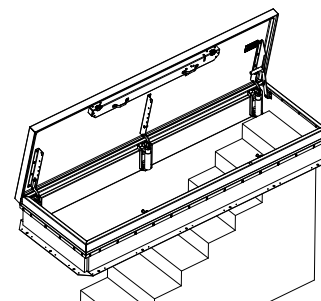

Service Stair

Locks (Roof Hatch)



Detention Lock



Mortise Operated Deadbolt

Additional locks and options available, call 1.800.547.2635 for more information.

MODEL	TYPE	BRAND	DESCRIPTION	LOCK ACCESS
D11	Detention	Brinks 7016	Keyed Lock	Interior + Exterior
D5A	Detention	Southern Steel 1010AM	Prep Only	Interior + Exterior
D2A	Detention	Southern Steel 1010A	Prep Only	Interior Only
D12	Detention	Brinks 7016	Keyed Lock	Interior Only
MS1	Mortise	Schlage Cylinder/Deadbolt	Keyed Lock	Interior + Exterior
MS2	Mortise	Schlage Cylinder/Deadbolt	Keyed Lock	Interior Only
MB4	Mortise	Best Cylinder/Schlage Deadbolt	Non-Keyed w/Plastic Core	Interior + Exterior

Operations (Smoke Vent)

OPENING



Fusible Link



Pneumatic Actuator



Electrical



Pull Handle
(External & Internal)

CLOSING



Rooftop Close
R



Manual Winch
W



Linear Actuator
A


SECURITY



Door Position
Sensor OP1

Note: Also available on Roof Hatches

Curbs



Single Wall
1



Double Wall
2



Curb Mount
3



No Counterflash
4




Apron Mount
5



1-1/2" Curb Mount
6

CURB HEIGHT




6 inch - 48 inch
H6 - H48

PITCH CORRECTION



Match Roof Pitch
P__

INSULATION




2 inch Polyiso
IRR

VENTILATION



Louvered Curb
V33


Domes (Roof Hatch + Smoke Vent)



Clear
(Standard)



White
LPW




Bronze
LPZ


COLOR	GLAZING	LIGHT TRANSMISSION	SOLAR FACTOR	R-VALUE
Clear	Single	92%	85%	1.25
White	Single	56%	56%	1.25
Bronze	Single	27%	35%	1.25
Clear/Clear	Double	92%	85%	2.0
Clear/White	Double	56%	56%	2.0

Note: Clear single glazing is the standard option, other options have additional charges and may require longer lead times.

Multiwall (Smoke Vent)



White
(Standard)




Clear
LMC




Green
LMG

COLOR	LIGHT TRANSMISSION	SOLAR FACTOR	SHADING COEFFICIENT
Clear	74%	75%	0.86
White	52%	63%	0.72
Bronze	37%	57%	0.65
Blue	45%	65%	0.74
Green	42%	60%	0.69

Note: White is the standard color, all other colors have additional charges and may require longer lead times.



Blue
LMB



Bronze
LMZ

Powder Coat

FINISH OPTION

Nystrom's polyester based powder coatings demonstrate superior gloss and color retention in a variety of outdoor environments. Powder coat provides outstanding corrosion resistance and exhibits excellent mechanical properties.

APPLICATION Steel or Aluminum

WARRANTY 5 year


NOTE ANSI 70 gray and High Reflectance White are the base colors of Roof Hatches and Smoke Vents, all other colors have additional charges and may require longer lead times.

Custom colors available, call 800.547.2635 for more information.

STOCK COLORS



ANSI 70 Gray
FP1



High Reflectance
White FP44




Red Oxide
FP2



Safety Yellow
FP48

STANDARD COLORS *Readily available, but not stocked by Nystrom.*



Coastal White
FP68



Bone White
FP3



Sandstone
FP5



Sierra Tan
FP8



Colonial Red
FP20



Dark Bronze
FP14



Charcoal Gray
FP7




Super Black
FP4

SPECIAL ORDER *Common industry colors, special order.*



Fine Ivory
FP13



Seawolf
FP15



Tan
FP17




Slate Gray
FP6



River Rouge
FP21



Brick Red
FP19



Brown
FP18



Military Blue
FP10



Arcadia Green
FP23



Hemlock Green
FP24



Forest Green
FP25



Teal
FP22

This color chart is for reference only and is not to be used for final color / material matching. Nystrom is not responsible or liable for color matches made with this chart.

Anodize

FINISH OPTION


Protective and decorative anodizing applied to aluminum creates a corrosion resistant finish.

The clear finish (FA1) uses sulfuric Class II coating with a 0.4-0.7 mil thickness.

The clear finish (FA2) and integral color uses Duranodic with 0.7 mil and thicker.

APPLICATION Aluminum

WARRANTY 5 year



Clear
FA1 / FA2



Champagne
FA3



Light Bronze
FA4



Medium
Bronze FA5



Dark Bronze
FA6



Extra Dark
Bronze FA7



Black
FA8



Copper
Anodize FA9

Trinar®


FINISH OPTION

Trinar® is a high performance fluoropolymer coating with 70% Polyvinylidene Fluoride (PVDF) and provides maximum resistance against color fade and chalking. The most durable and long lasting finish in the industry; meets or exceeds AAMA 620/621 and AAMA 2605.


APPLICATION Aluminum

WARRANTY 10 year (standard) or 20 year

STANDARD COLORS



Polar White
FK80



Bone White
FK81



Taupe
FK82



Dove Gray
FK83



Slate Gray
FK84




Galaxy Blue
FK85



Forest Green
FK86



Autumn
FK87




Medium
Bronze FK88



Black
FK89

SPECIAL ORDER *Common industry colors, special order.*



White Stone
FK90



Surrey Beige
FK91



Sandstone
FK92



Medium Taupe
FK93



Seal Brown
FK94




Milano Blue
FK95



Aged Copper
FK96



River Rouge
Red FK96



Bright Silver
FK98



Copper
FK99

Visit www.nystrom.com for the latest version of this document and more information.



9300 73rd Avenue North
Minneapolis, MN 55428

Phone (800) 547-2635
Fax (800) 317-8770

